
nODD ECAL layouts - reviewer overview

Si-W and ALLEGRO LAr candidates. Review entry, not a TDR.


Snapshot: 2026-10-14. Four-page PDF.

1 - Candidate layouts

Both candidates retain the documented tracker (45,646 sensitive planes) and the proposed inner solenoid (3 T central target; PR #64, open). Its radial service reservation reaches 1.64 m; the computed vessel ends at r=1.559 m and |z|=3.85 m. These DRAFT prototypes have no complete-detector, installed-field or engineering acceptance.

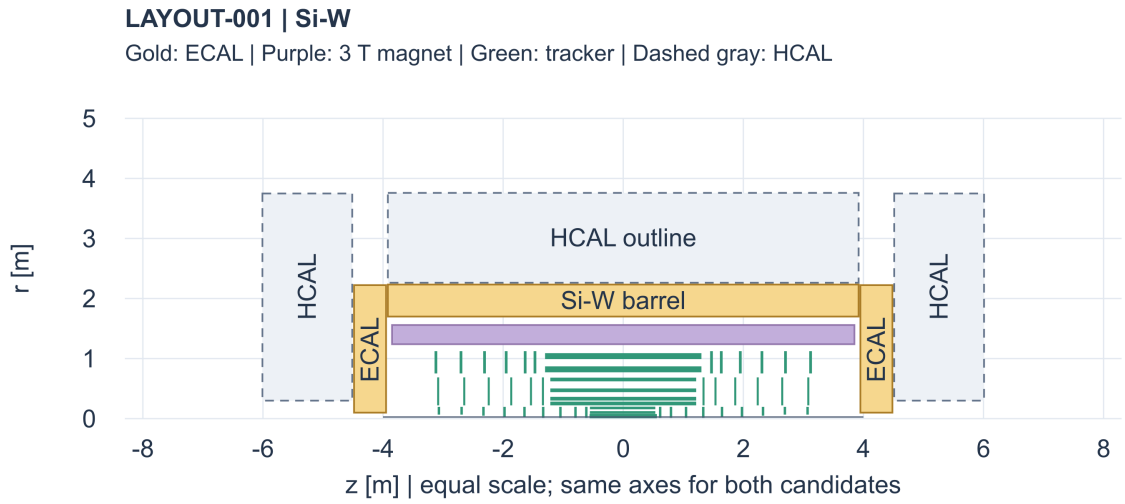

LAYOUT-001: Si-W ECAL and rough HCAL outline. FCal and muon systems remain absent.

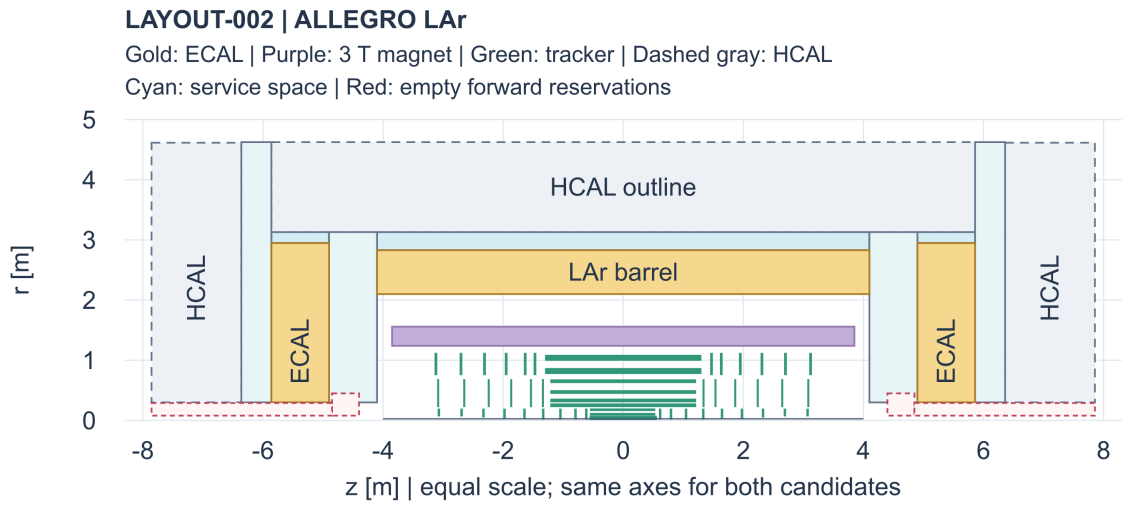

LAYOUT-002: LAr ECAL, enlarged HCAL outline and empty service/forward reservations. Neither forward collar nor FCal is built.

2 - Si-W ECAL prototype

Open component proposals: PR #71 (Si-W ECAL barrel prototype) and PR #70 (Si-W ECAL endcap prototype). The same sampling and board stack is carried through sixteen barrel sectors and sixteen wedge carriers per endcap.

Element	Current prototype choice
Sampling / sensors	48 layers; 1.9 mm tungsten alloy and 0.5 mm silicon. Standard 90 mm blanks have an 88 mm active window and 5.5 mm pad pitch; physical guards remain passive.
Barrel construction	Seven 1 m slabs plus two short end slabs per sector/layer. Alternating ±96 mm shifts move service joints through depth; 94 mm boards on a 96 mm pitch retain real gaps.
Endcap packing	76 squares plus 36 custom edge sensors per wedge/layer; 29 mask profiles. The 100 mm aperture apothem, 30 mm inner support and 120 mm outer service bay are unsigned allocations.
Support / cooling	Aluminium skins and frames, explicit PCB/ASIC/thermal contacts; a 3 mm copper plate with 2 mm-OD Ti/water runs. External collectors, connectors and cable routing are excluded.

Material and service drivers

Recorded model masses are 299.003 t for the barrel and 98.949 t for both endcaps. Copper contributes 119.693/40.591 t, dominated by the cooling plates. Continuous heat hypotheses give 188.40/71.05 kW; the summed ideal water flow is 12.414 kg/s for a 5 K rise. These are inventory/power calculations, not thermal or hydraulic qualification.

Coverage and evidence limits

Barrel active-face area is 54.88-64.57% by layer; aligned sector-centre cracks remain. Custom masks give 69.47% endcap active-face area. At η=4, the endcap-only azimuth sample has active silicon in 68.89% of directions, with blind seams/guards. Native construction, IDs, mass and overlap checks plus sparse saved hits establish the isolated implementation; efficiencies and showers remain unvalidated.

Barrel design and evidence · Endcap design and evidence

3 - ALLEGRO-style LAr ECAL prototype

Open component proposals: PR #73 (LAr ECAL barrel and service interfaces prototype) and PR #74 (LAr ECAL endcaps and layout prototype). The separate inner 3 T coil is retained; ALLEGRO's outer-solenoid proxy is omitted.

Element	Current prototype choice
Barrel sampling	1,536 inclined periods, eleven compartments, two active gaps per electrode. Sampling radii 2.1728-2.5783 m; active half-length 3.910 m. Pb core 1.8 mm, total steel/glue 0.2/0.1 mm and 1.2 mm PCB; first core is passive LAr.
Turbine endcaps	Three wheels, 384/720/1,360 periods, 49° tilt, active r=410-2,790 mm and 450 mm depth. Inner Pb core 1.1 mm, total steel/glue 0.2/0.1 mm and 1.3 mm electrode. Radial/axial readout is virtual, distinct from source calibration subdivisions.
Supports / cold boards	Sixteen barrel H-rings and 5,888 wet board slots. Each endcap has three wheel support tubes, a 30 mm rear annulus (1.954 t/end) and 1,584 board slots. The unported rear annulus blocks direct signal/HV routes; passages and attachments need redesign.
Cryostat / cooling	Explicit warm/vacuum/cold wall proxies, 170 mm barrel rear bath and 250 mm endcap rear bath. N2 branches have 18 mm bore/20 mm OD; headers, seals, pressure/temperature and return-circuit qualification remain open.

Space and engineering consequences

The model has 2.286 million barrel cells and 601,600 per endcap. The Cartesian turbine taper differs from cylindrical-radius intent by up to 0.117 mm in the inner wheel. Physical mass includes bath displacement and cold service proxies. A 200 kW cooling allowance falls 58 kW short of the 258 kW adverse planning scenario, before complete static-heat qualification.

Native component checks and the ECAL-only combined audit do not qualify the tracker/coil/HCAL union. LAr remains uncovered at η=4; forward reservations contain no hardware. Barrel/endcap transition directions have partial depth, requiring later material/response design.

Barrel/service design · Endcap/forward design

4 - Budgets and review priorities

Budget / boundary	Si-W candidate	LAr candidate
ECAL model mass: barrel / both ends / total	299.003 / 98.949 / 397.952 t	252.508 / 131.173 / 383.681 t
Principal material inventory	198.595 t W alloy; 160.284 t Cu	187.692 t Pb; 98.668 t LAr; 58.636 t Al
Barrel ECAL package bounds	Apothem 1.700-2.233 m; $\|z\| \le 3.920$ m	Radius 2.100-2.830 m; $\|z\| \le 4.100$ m
Endcap ECAL package bounds	$\|z\| = 3.950$-4.483 m; outer apothem 2.223 m	$\|z\| = 4.900$-5.860 m; outer radius 2.949 m
ECAL / HCAL routing allocations	30 mm interface gaps; collectors unbuilt	300 mm barrel radial; 181 mm beside endcap; 800/500 mm axial before/after endcap
HCAL outline extent	Outer apothem 3.759 m; $\|z\|_{max} = 6.009$ m	Outer apothem 4.626 m; $\|z\|_{max} = 7.856$ m
Outline max corner radius / full axial length	3.833 m / 12.018 m	4.717 m / 15.712 m

ECAL masses are native-ledger sums with different passive/service hypotheses; shared tracker/solenoid, detailed HCAL and absent systems are excluded. Aluminium totals include walls, supports and boards. Masses do not rank performance. HCAL outline volume grows ×1.77; loads and magnetic effects remain unvalidated.

Shared tracker+Be inventory: 2.860 t (Be 2.036 kg); planning region $r \le 1.20$ m, $|z| \le 3.60$ m does not bound passive services. At $\eta = 0$, separate examples are tracker 0.329-0.418 X0 and illustrative solenoid 1.402 X0 (1.00-2.10 scenarios). These are not a combined pre-ECAL map. Solenoid mass/support inventory remains unassigned. Solenoid material assumptions.

Bounded reviewer decisions

Review the Si-W copper/cooling choice, manifold endpoints, seams and custom-mask process; review LAr vessel/support approximations, blocked service paths, spare-board power and cryogenic heat margin. Confirm space/interface ownership before detailed HCAL work. Forward acceptance, shielding and the machine/beam-pipe continuation need a separate design. No FCal or muon system/magnets are yet implemented.

Status and traceability

All four component PRs remain open in this 2026-10-14 snapshot. Dimensions/services are unsigned nODD choices; native budgets are model inferences. Recorded checks grant no engineering sign-off, installed field or shower/jet/particle-flow validation. This brief is a common review entry; the pinned component records remain authoritative.

Frozen source and evidence catalogue · Si-W layout inputs · LAr layout inputs